

ECS-508S-SF-HA 8-ch 1-SSD Intelligent Edge Computing Server

ECS-508S-SF-HA

Overview

ECS-508S-SF-HA is an industrial-grade intelligent analysis device that works with ordinary network cameras. The device is integrated with video decoding, data transmission, data storage, and intelligent algorithms. It receives videos from ordinary network cameras, analyzes objects in the videos, and outputs an alarm upon detection of an abnormal behavior. The device is easy to deploy, operate, and adapts to different environments.

The device utilizes deep learning algorithms to achieve fast and accurate face comparsion and action analysis. It complies with industri al-grade standards, featuring a sophisticated and sturdy appearance, and is suitable for various indoor and outdoor application scenari os. The device offers abundant APIs to meet various application requirements and facilitate integration with third-party systems.



Features

- Supports 8-ch video stream based face snapshot and comparison, supports face-behavior linkage (identifying a person after detecting an abnormal behavior.
- Supports 8-ch video stream based action analysis, offers algorithms for fire detection, smoke detection, illegal parking, evacuation route obstruction detection, item loss, perimeter protection (intrusion detection, enter area, leave area, cross line detection), sleep on duty detection, absence detection, area people counting, people exceed the limit, no hard hat detection, no work clothes detection, no reflective clothing detection, smoking detection, calling detection, tripwire people counting, fall detection, no mask detection, long stay detection, fight detection, and using mobile phone detection.
- Supports generating alarm videos/images and reporting alarm information.
- Supports H.264 and H.265 video streams.
- Supports connecting 8 third-party cameras via Onvif and RTSP.
- Dual Gigabit network interfaces enable dual-network IP settings to adapt to different networking environments.



- Supports browser-based access and control.
- Lightweight, fanless structure, flexible deployment, suitable for harsh conditions including dusty, oily, very hot or very cold environments.

Ordering Info

| Product Model | Description |
|--|-------------|
| ECS-508S-SF-HA 8 Channels 1 Hard Disk Intelligent Edge small station | |

Specifications

| Model | ECS-508S-SF-HA | ECS-504S-SF-HA | ECS-516S-SF-HD | | |
|-------------------------------------|--|---|---|--|--|
| VCA | | | | | |
| Smart | 1, General functions: face detection, Intrusion Detection (support pedestrians, motor vehicles, and nonmotorized vehicles), Overcrowding Detection, Area People Counting, Tripwire People Counting, Preset Marker Detection, Enter Area, Leave Area, Cross Line Detection 2, Environmental safety: Fire Detection, Fume Detection, Evacuation Route Obstruction, Object Left Behind, Rat Detection, Dog Detection, Uncovered Soil Detection, Improper Stacking Of Materials, Trash Bin Open Detection, Trash Bin Overflow, Exposed Trash, Bagged Trash, Charging Gun Not In Place Detection, Gas Cylinder Detection, No Fire Extinguisher Detection, Dump Truck Without Tarp Detection, Oil Leak Detection, Water Leak Detection, Gas Leak Detection, Test Paper Color Change Detection 3, Personal wearing safety clothing: No Hard Hat Detection, No Work Clothes Detection, No Reflective Clothing Detection, No Mask Detection, Shirtless Detection, No Chef Uniform Detection, No Chef Hat Detection, No Safety Harness Detection, No Safety Belt Detection, No Safety Goggles Detection, No Safety Gloves Detection, No Dust/Gas Mask Detection, Exposed Long Hair Detection 4, Personnel behavior safety: Sleep On Duty Detection, Absence Detection, Smoking Detection, Calling Detection, Using Mobile Phone Detection, Fall Detection, Climbing Detection, Long Stay Detection, Fight Detection, Crowd Detection, Quick Moving Detection, Inadequate Worker, Knife/Stick In Hand Detection 5, Vehicle safety: Illegally Parked Motor Vehicle, Illegally Parked Non-Motor Vehicle, Entering/Exiting Service/Charging Station, Campus Entrance/Exit Lpc, Illegal Fueling Detection, Construction Vehicle Detection | | | | |
| Face detection Face library | 8-channel (Face detection and behavior analysis cannot be enabled simultaneously on the same channel) 128 face libraries, total 20,000 face | 4-channel (Face detection and behavior analysis cannot be enabled simultaneously on the same channel) 128 face libraries, total 20,000 face | 16-channel (Face detection and behavior analysis cannot be enabled simultaneously on the same channel) 128 face libraries, total 100,000 face | | |
| capacity | images | images | images | | |
| | IIIIages | IIIIages | images | | |
| Work clothes library capacity | 8 work clothes libraries, a single storage capacity of 50 images | | | | |






| GIIV | | | | | | | |
|-----------------|-------------------------------------|------------------------------|--------------------------------|--|--|--|--|
| Storage | | | | | | | |
| DDR RAM | 8GB DDR4 | 4GB DDR4 | 8GB DDR4 | | | | |
| Hard disk | 2.5-inch, 128GB SSD included | 2.5-inch, 128GB SSD included | 2.5-inch, 1TB SSD included | | | | |
| Alarm capacity | Alarm capacity | | | | | | |
| Alarm image | Max 20,000 alarm images, | Max 20,000 alarm images, | Max 150,000 alarm images, | | | | |
| Alarm video | Max 20,000 alarm video clips | Max 20,000 alarm video clips | Max 150,000 alarm video clips, | | | | |
| Electrical prop | Electrical property | | | | | | |
| Operating | -40~70°C | | | | | | |
| temperature | | | | | | | |
| Operating | 5% to 90% (non-condensing) | | | | | | |
| humidity | 5% to 50% (non-condensing) | | | | | | |
| Power | | | | | | | |
| consumptio | ≤20W | | | | | | |
| n | | | | | | | |
| Weight | ≤1.5KG (with SSD) | | | | | | |
| Dimensions | 56.3mm(H)×251.3mm(D)×137.7mm(W) | | | | | | |
| External interf | ace | | | | | | |
| Network | 2 x 10M/100M/1000M adaptive Etherne | t interfaces (RJ45) | | | | | |
| interface | . , , | | | | | | |
| USB | 2 x USB2.0, 1 x USB3.0 | | | | | | |
| interface | | | | | | | |
| Alarm input | 4-ch | | | | | | |
| Alarm output | 4-ch | | | | | | |
| Serial | | | | | | | |
| interface | 1 x RS-485 (phoenix connector) | | | | | | |
| Power | | | | | | | |
| supply | 12V/3A | | | | | | |
| Channel mana | gement | | | | | | |
| Protocol | rtsp,onvif | | | | | | |
| Data Dock | | | | | | | |
| Websocket | , | | | | | | |
| mode | $\sqrt{}$ | | | | | | |
| HTTP/HTTPS | | | | | | | |
| mode | | | | | | | |
| HTTP/HTTPS | 1 | | | | | | |
| live | \checkmark | | | | | | |
| Compliance | | | | | | | |
| NDAA | Support | | | | | | |
| Compliant | Support | | | | | | |
| | | - | | | | | |



Dimensions

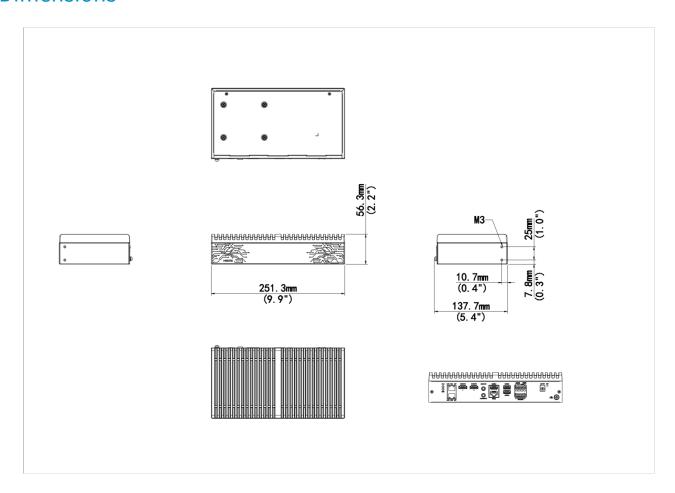

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

http://www.uniview.com

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.